
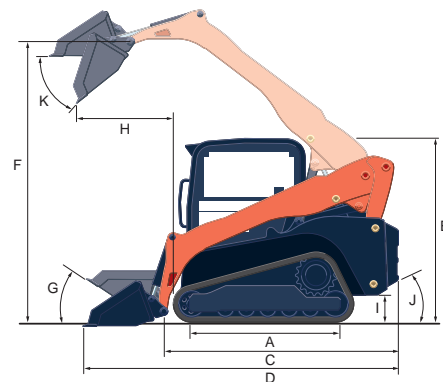


SPECIFICATIONS

Model				SVL75-2		SVL90-2	
Type of operator station				Open CAB / Closed CAB		Open CAB / Closed CAB	
Engine	Model			V3307-CR-TE4		V3800-CR-TE4	
	Gross HP						

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications.

DIMENSIONS

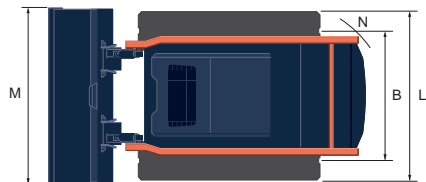

Model				SVL75-2		SVL90-2	
A	Length of track on ground	in. (mm)		56.5 (1436)		65.6 (1667)	
B	Track gauge	in. (mm)		53.3 (1355)		59.5 (1512)	
C	Length w/o bucket	in. (mm)		109 (2768)		117 (2972)	
D	Length w/bucket on ground	in. (mm)		140.8 (3576)		148.2 (3764)	
E	Height to top of cab	in. (mm)		82 (2083)		83.4 (2118)	
F	Bucket hinge pin height at max. lift	in. (mm)		119.1 (3025)		128.6 (3266)	
G	Rollback angle at carry position	degree		27		27	
H	Reach at max. lift and dump	in. (mm)		41.7 (1060)		40.7 (1035)	
I	Ground clearance	in. (mm)		11.7 (296)		11.8 (299)	
J	Departure angle	degree		31.5		31	
K	Max. dump angle	degree		40		43	
L	Vehicle width	in. (mm)		68.3 (1735)		77.2 (1962)	
M	Width with bucket	in. (mm)		72 (1829)		80 (2032)	
N	Turning radius from center-machine rear	in. (mm)		107.1 (2720)		113.5 (2882)	