


SPECIFICATIONS

Model				SVL75-2		SVL95-2s	
Type of operator station				Open CAB / Closed CAB		Open CAB / Closed CAB	
Engine	Model			V3307-CR-TE4		V3800-TIEF4	
	Output (SAE J1995 gross)		HP (kW)/rpm	74.3 (55.4)/2400		96.4 (71.9)/2400	
	Output (SAE J1995 net)		HP (kW)/rpm	73.2 (54.6)/2400		95.0 (70.8)/2400	
	Displacement		cu.in. (cc)	203.3 (3331)		230.0 (3769)	
	Cylinders			4		4	
	Bore × Stroke		in.(mm)	3.7 (94) × 4.72 (120)		3.94 (100) × 4.72 (120)	
	Aspiration			Turbocharged		Turbocharged	
Loader Performance	Rated operating capacity-35% tipping load		lbs. (kg)	2300 (1043)		3200 (1451)	
	Tipping load		lbs. (kg)	6570 (2980)		9143 (4147)	
	Breakout force	Bucket	lbf. (kg)	6204 (2814)		7065 (3200)	
		Lift arm	lbf. (kg)	4766 (2162)		5181 (2350)	
	Lift arm path			Vertical		Vertical	
Undercarriage	Track Width		in. (mm)	15.0 (380)		17.7 (450)	
	Ground pressure		psi	4.7 / 4.9		4.4 / 4.5	
	Track rollers (per side)			4		5	
	Track ground contact length		in. (mm)	56.5 (1436)		65.6 (1667)	
	Travel speed	Low	mph (km/h)	4.7 (7.5)		5.0 (8.0)	
		High	mph (km/h)	7.1 (11.5)		7.3 (11.7)	
	Traction force		lbs. (kg)	9678 (4390)		12178 (5524)	
Min. ground clearance		in. (mm)	11.7 (296)		11.5 (293)		
Hydraulic system	Aux. hydraulic flow	Std./High	gpm (ℓ/min.)	17.4 (66.0) / N/A		23.1 (87.6) / 40.0 (152)	
	Aux. hydraulic pressure		psi (kgf/cm²)	3185 (224.0)		3553 (249.8)	
Service refill capacities	Hydraulic system		gal. (ℓ)	15.9 (60)		17.96 (68)	
	Hydraulic tank		gal. (ℓ)	9.2 (35)		10.1 (38.1)	
	Fuel tank		gal. (ℓ)	24.6 (93)		28.8 (109)	
	DEF tank		gal. (ℓ)	N/A		5.0 (18.8)	
Operating weight (Includes operator weight 165lbs.)			lbs. (kg)	9039 (4100) / 9315 (4225)		11299 (5125) / 11574 (5250)	

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications.

DIMENSIONS

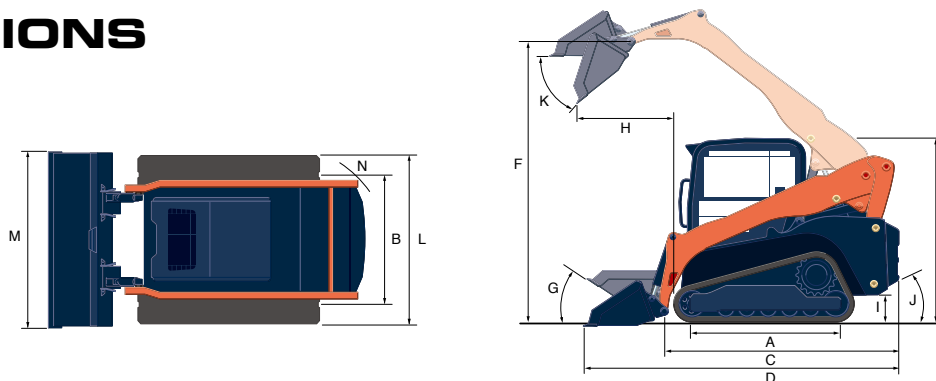

Model			SVL75-2	SVL95-2s
A	Length of track on ground	in. (mm)	56.5 (1436)	65.6 (1667)
B	Track gauge	in. (mm)	53.3 (1355)	59.5 (1512)
C	Length w/o bucket	in. (mm)	109 (2768)	123.5 (3137)
D	Length w/bucket on ground	in. (mm)	140.8 (3576)	154.6 (3929)
E	Height to top of cab	in. (mm)	82 (2083)	83.3 (2116)
F	Bucket hinge pin height at max. lift	in. (mm)	119.1 (3025)	128.5 (3264)
G	Rollback angle at carry position	degree	27	27
H	Reach at max. lift and dump	in. (mm)	41.7 (1060)	40.7 (1035)
I	Ground clearance	in. (mm)	11.7 (296)	11.5 (293)
J	Departure angle	degree	31.5	31
K	Max. dump angle	degree	40	43
L	Vehicle width	in. (mm)	68.3 (1735)	77.2 (1962)
M	Width with bucket	in. (mm)	68 (1727)	80 (2032)
N	Turning radius from center-machine rear	in. (mm)	107.1 (2720)	127 (3220)